



MAXess



eRAM™

Remote Area Manager

**Features**

- Optimizes AXxess™ NS performance by providing local control of the panel network, including access levels, global I/O dependencies and local event buffering (10,000 events)
- Provides reliable access control communication between AXxess NS host and the panel network via LAN/WAN
- Maintains all configuration information locally, even during extended power/communications outages
- Precision access/unlimited access levels
- Supports up to 20 readers
- Includes two channels of communications to door controllers
- Prioritized alarm downloading
- Firmware conveniently flash upgradeable over network connection
- Easily installs in new or existing systems, supporting MAXxess enhanced communication protocol
- Mounts in a BLP enclosure
- One time event schedules
- Two badge rule

The eRAM™ is a high performance, area controller featuring a Linux operating system. The Linux operating system is embedded in the eRAM and greatly enhances the reliability and capability of the security management system. In addition, it provides several features to improve system performance in any size application.

- Full operation of dependencies, alarm zones
- Up to 220 sensors per eRAM
- Up to 20 readers
- Unlimited access levels
- Up to 256 unique schedules
- Up to 200 input/output dependencies
- Up to 999 holidays with three types of holidays per eRAM

**High-speed Data Communication**

eRAM is an addition to the MAXxess family of IP products designed solely for Ethernet applications. The 100 Mbps Ethernet communications allows the system to quickly process data with no bottlenecks.

**Real-time Operating System**

The Linux real-time operating system enhances the performance and response time of the information. The internal relational database makes it simple to perform diagnostics and troubleshooting.

**ApeXX™ Software Enhances Performance of the eRAM**

ApeXX was developed to provide peak performance for the eRAM. ApeXX minimizes network traffic with incremental updates. Once the system is installed it will never need to download the entire cardholder database.

**Revolutionary Features**

ApeXX allows unlimited site codes, access levels and a twenty-digit (64 bit) badge number. The software has additional built-in features that include ADA/DDA special unlock by cardholder, a lock-down feature to secure in an emergency situation and user selectable PIN numbers, up to eight-digits.

**Companion Products**

- AXxess™ NS / AXxess EXpress Security Management Software
- Barlock™ 206 Processor
- Input Module
- BUPS Power Supply
- Din Rail Mounting Kit
- Enclosure Kit
- Can also be supported with the eAXxess family of software



# MAXxESS

MAXxess Systems, Inc.

## eRAM™ Remote Area Manager

### Specifications

#### SYSTEM REQUIREMENTS

- BLP206 must be version 06-074 or later
- AXxess NS with MultiPort v4.3 or later

#### ELECTRICAL

- Power supply 12 VDC, .5 amp (not included)

#### MECHANICAL

- Unit mounts on second DIN rail in existing BLP enclosure or in its optional enclosure
- 5.8" W x 4.825" H x 1.275" D (147.32 mm x 122.55 mm x 32.38 mm)

#### ENVIRONMENTAL

Temperature 32° to 122° F (0° to 50° C)

Humidity 5% to 95% relative, non-condensing

#### ACCESSORIES

- BUPS used to power eRAM
- DIN mounting kit (not included)

eRAM comes with a one-year limited warranty.

#### Headquarters

1040 North Tustin Avenue  
Anaheim, CA USA  
92807

Tel 714 772 1000

800 842 0221

Fax 714 399 9358

Email sales@maxxess-systems.com

#### Service & Technical Support

Tel 714 772 1000

800 842 0221

Fax 714 399 9358

Email support@maxxess-systems.com

#### MAXxess Systems Europe, Ltd.

##### Europe, Middle East, Africa

Doncastle House,  
Doncastle Road,  
Bracknell, Berkshire, UK  
RG12 8PE

Tel +44 (0) 870 234 7654

Fax +44 (0) 870 234 7655

Email sales@maxxess-systems.com

#### Service & Technical Support


Tel +44 (0) 870 234 7654

Fax +44 (0) 870 234 7655


Email support@maxxess-systems.com

[www.maxxess-systems.com](http://www.maxxess-systems.com)

#### eRAM — LAN/WAN Configuration for AXxess NS

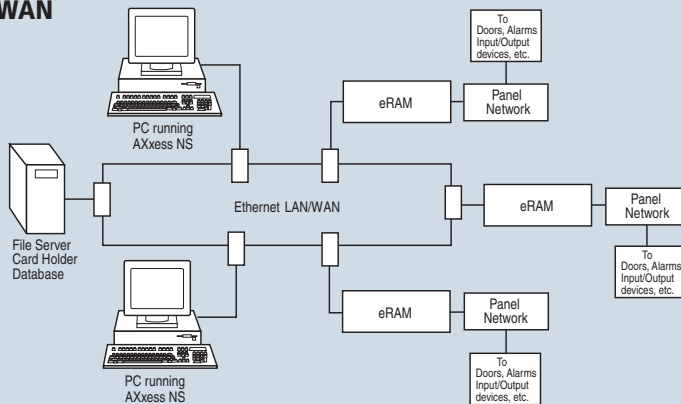

#### eRAM — LAN/WAN Configuration for AXxess EXpress

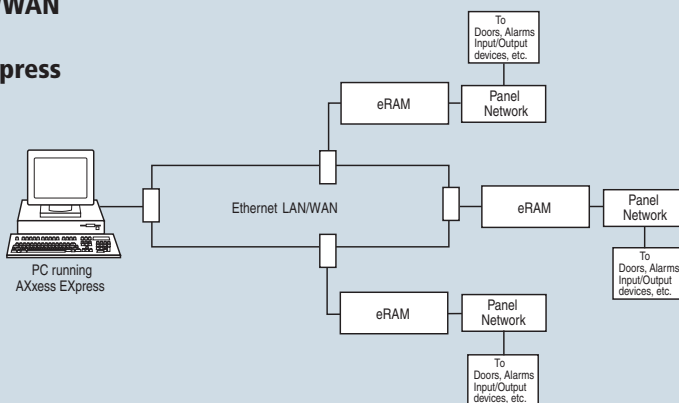

Information furnished by MAXxess is believed to be accurate and reliable. However, no responsibility is assumed by MAXxess for its use nor for any infringements of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent rights of MAXxess Systems, Inc. Specifications subject to change without notice.